



- BACK2LIFE Innovative light fixture refurbish and recycle program
- SWAP Tool-less interchangeable reflector assembly system
- SHIP2FAST Fast delivery program

Project:

QUANTITIES:

**KOOLED KB** LED LINEAR PROFILE




BUILD YOUR CODE

KB	PRODUCT	LENGTH	DELIVERED LUMEN / FT	LIGHT DISTRIBUTION	LED COLOR	CRI	BEAM SPREAD	VOLTAGE	HOUSING COLOR	DIMMING OPTION	MOUNTING
<b>KB</b> _____ in or mm <sup>1</sup> _____ continuous run <sup>1</sup> . <sup>1</sup> LED cutting increment:4"(99 mm) <sup>2</sup> Continuous run includes linears, custom angle couplers <sup>2</sup> Can included custom angles couplers			<b>3</b> 300LM/FT (2.5W/FT)	<b>10</b> 100% DW 0% UP	<b>27</b> 2700 K	<b>84</b> 84 CRI	<b>FC</b> Frosted cover <sup>3</sup>	<b>1</b> 120V	<b>AN</b> Natural anodized	<b>ADIM</b> 0-10V 5%	<b>WM</b> Wall mount
			<b>4</b> 400LM/FT (3.4W/FT)	<b>91</b> 90% DW 10% UP	<b>30</b> 3000 K	<b>90</b> 90 CRI	<b>PL</b> 60° Prismatic lens	<b>2</b> 277V	<b>BKAN</b> Black anodized	<b>ADIM+</b> 0-10V 0.1%	<b>S10</b> Suspended 10'
			<b>5</b> 500LM/FT (4.4W/FT)	<b>82</b> 80% DW 20% UP	<b>35</b> 3500 K	<b>95</b> 95 CRI	<b>FL</b> Fresnel cover	<b>3</b> 347V	<b>WH</b> White finish	<b>DALI</b> Dali	<b>S15</b> Suspended 15'
			<b>6</b> 600LM/FT (5.3W/FT)	<b>64</b> 60% DW 40% UP	<b>40</b> 4000 K				<b>+</b> Custom color anodized	<b>CA</b> Casambi	
			<b>7</b> 700LM/FT (6.3W/FT)	<b>55</b> 50% DW 50% UP	<b>50</b> 5000K					<b>—</b> None	
			<b>8</b> 800LM/FT (7.4W/FT)	<b>46</b> 40% DW 60% UP	<b>TW</b> (27k-50K)						
			<b>9</b> 900LM/FT (8.5W/FT)								
			_____ LM/FT ( _____ W/FT)*								
				*custom							

DIMENSIONS

- Hight : 4" (100mm)
- Wide : 1-3/8" (34mm)
- Max extrusion length : 20' (6m)

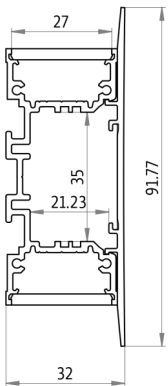

TECHNICAL PRODUCT SPECIFICATIONS

- Nominal Efficacy : up to 122.9 lm/W, Max 800lm/ft f
- Reported Life : 50'000 hrs. in accordance with IESNA TM-21-11.
- 3-Step MacAdam ellipse color consistency for clean and uniform lighting.
- Photometry conducted by independant NVLAP (National Voluntary Laboratory Accreditation Program) accredited testing laboratory in accordance with IESNA LM-79-08.
- Lumen maintenance tested by LED chip manufacturer in accordance with IESNA LM80-08.
- 5-year warranty on LED light engine, driver and all lighting fixture components.
- Track mount system, suspended or surface mount mounting system.
- Input class 2 : 120V-277V : Max 8.5W / ft. down light
- Dimming 0-10V down to 0.1%
- Tool-less interchangeable reflector assembly system
- Rated for dry locations only. Applications in damp or wet locations will void warranty.
- CSA certified to US and Canadian safety standards
- Luminaires are made in Canada, Montréal
- Luminaire can be refurbished and if available with a new generation of led and driver.
- Bluetooth dimming or CCT control via free Casambi app for Android and Apple.
- Linear and angle coupler for run system.