



ansorg

ON LIGHT



100% recyclable,
no composites,
easy separation.

MADE IN

Lightstrip LPR 5" LED ELBOW LIGHTSTRIP


BUILD YOUR CODE

LPR	PRODUCT	LUMENS	LED COLOR	CRI	BEAM SPREAD	VOLTAGE	HOUSING COLOR	DIMMING OPTION		
LPR	12	1200 LM (8.1W) 189LM/W	27	2700 K	84	nominal CRI at 3500k	SP 14.8°	1 120V	WH RAL 9016 white	ADIM 0-10V 5%
	15	1500 LM (9.9W) 186LM/W	30	3000 K	90	90 CRI min. value	MFL 28°	2 277V	BK RAL 9005 black	DALI Dali
	18	1800 LM (12W) 184LM/W	35	3500 K	97	*(2700k 3000K 5600K)	FL 31°	3 347V	+ Custom color	LVP Line voltage dim.
	20	2100 LM (14.3W) 182LM/W	40	4000 K			WFL 55.8°			— None
	25	2500 LM (16W) 194LM/W								*Bluetooth control via Ca-sambi app
	30	3000 LM (20W) 192LM/W								
	35	3500 LM (22W) 190LM/W								
	40	4000 LM (25W) 185LM/W								

ACCESSORIES : Order as separate part number.	
HC	Honeycomb louver
PG	Protection Glass (glass or plexi)
LS	Lens
CA	Custom adapter between ceiling opening and trim.
LP-S1	Lightstrip single square frame
LP-S2	Lightstrip double square frame
LP-S3	Lightstrip triple square frame

DIMENSIONS

*dimension are in mm

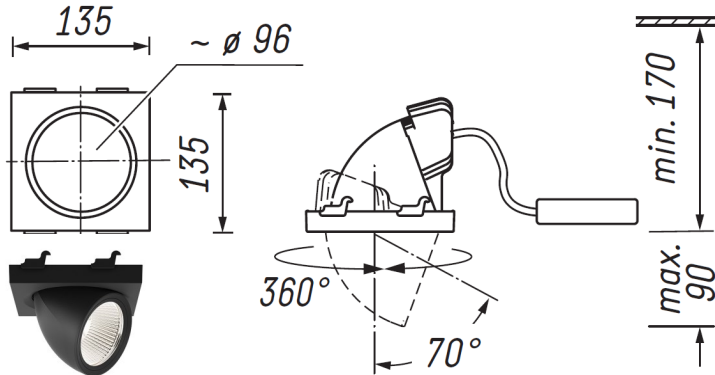

ON LIGHT CHEAT SHEET :

- Nominal Efficacy : up to 194 lm/W
- 3-Step MacAdam ellipse color consistency for clean and uniform lighting.
- Failure rate C0/B10 : 50 000h to 25°C Lumen maintenance L80/B10 : 50 000h to 25°C
- Luminaire can be refurbished with newest available LED & driver, new 5 year warranty.
- Input class 2: 120V. Max settable intrack driver output :25W / 0.25A
- Lumen maintenance for LED's tested by LED chip manufacturer in accordance with IESNA LM80-08.
- 5-year warranty on LED light engine, driver and all lighting fixture components. 15 year Lifetime.
- Tool-less interchangeable reflector and accessories assembly system. Pure aluminum reflector.
- Installation for dry location only : IP20
- Retrofit installation
- ETL certified to US and Canadian safety standards.
- Assembled in Beloeil, QC, Canada

Weight trim: 2.2 lb (1.0 kg)

Height in ceiling :5-5/8" min clearance

Weight driver: 1.2 lb (0.6kg)

Ceiling opening: 5-1/8" (135mm)

DELIVERED LUMEN <small>Nominal value at 3500K & 84 CRI</small>															
CCT OPTION	2700K	2700K	2700K	3000K	3000K	3000K	3500K	3500K	3500K	4000K	4000K	4000K	Bread	Meat	Fish
CRI OPTION	80	90	97	80/A	90	97	84	90	A/80	84	90	A/80	80	80	80
MULTIPLIER	.93	.77	.67	.96	.80	.71	1	.83	.78	1.0	0.86	.83	.86	.53	1

Last update 11/24/2022

Due to continuous improvements, the information herein may be changed without notice



ansorg

ON LIGHT

Lightstrip LPR 5-5/16" LED DOWNLIGHT FIXTURE

Light distribution with reflector

