



BACK2LIFE Innovative light fixture refurbish and recycle program  
SHIP2FAST Fast delivery program



Sun Catcher

11-1/2" & 22" LED LINEAR LIGHTING FIXTURE




SC	PRODUCT	DELIVERED LUMENS	LED COLOR	CRI	BEAM SPREAD	SHADE FINISH	VOLTAGE	HOUSING COLOR	DIMMING OPTION	MOUNTING	
SC	Sun catcher	65 6500 LM (1x30W) 2x7 LED 85 8500 LM (1x40W) 2x7 LED 105 10500 LM (2x40W) 2x14 LED 125 12500 LM (1x80W) 2x14 LED 150 15000 LM (1x93W) 2x14 LED 180 18000 LM (2x53) 2x14 LED	27 2700 K 30 3000 K 35 3500 K 40 4000 K 50 5000 K	80 80 CRI* 90 90 CRI*	AB Asymmetric beam for aisle lighting WW Wall wash beam FB 35° Flood beam MWB 50° Medium wide beam WB 80° Wide beam	BG Black gloss WG White gloss MG Metal gloss BM Black matt WM White matt MM Metal matt	1 120V 2 277V 3 347V*	WH RAL 9016 white BK RAL 9005 black SL RAL 9006 silver + Custom color	ADIM 0-10V Dim. DALI Dali — ON - OFF	TS3 Track STUCCHI 3C® TS2 Track STUCCHI 2C® CM Canopy mount S5 Suspended 5ft S10 Suspended 5ft S15 Suspended 5ft	
		Nominal value at 3000K & 80 CRI.		*min. value						*suspended & canopy mount version only	
		Custom lumen output only on request									

ACCESSORIES : Order as separate part number.	
Stucchi ONE TRACK	4',8',12' 3 circuits track with integrated DALI/0-10V control Recessed/surface mount/high track , black, grey, white finish + accessories
Global track	4',8',12' 3 circuits track, surface mount only, white & black finish

DELIVERED LUMEN Nominal value at 3500K & 84 CRI															
CCT OPTION	2700K	2700K	2700K	3000K	3000K	3000K	3500K	3500K	3500K	4000K	4000K	4000K	Bread	Meat	Fish
CRI OPTION	80	90	97	80/A	90	97	84	90	A/80	84	90	A/80	80	80	80
MULTIPLIER	.93	.77	.67	.96	.80	.71	1	.83	.78	1.0	0.86	.83	.86	.53	1

DIMENSIONS

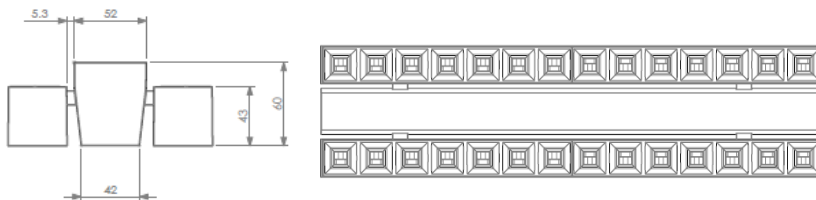

LENGHT 2 x 7 LED : 11-1/2" (290mm)

LENGHT 2 x 14 LED : 22" (565.5mm)

WEIGHT 2 x 7 LED : 7 lb (3.5kg) 4.8 lb (2.5 kg)

WEIGHT 2 x 14 LED : 4.8 lb (2.5 kg)

Last update 2023-03-23

ON LIGHT CHEAT SHEET :



- Nominal Efficacy : up to 190 lm/W
- Reported Life : 50'000 hrs. in accordance with IESNA TM-21-11.
- 3-Step MacAdam ellipse color consistency for clean and uniform lighting.
- Photometry conducted by independent NVLAP (National Voluntary Laboratory Accreditation Program) accredited testing laboratory in accordance with IESNA LM-79-08.
- Lumen maintenance for luminaire LED's tested by LED chip manufacturer in accordance with IESNA LM80-08.
- 5-year warranty on LED light engine, driver and all lighting fixture components.
- Dark Light concept with UGR <19
- Die-Cast aluminum construction.
- Rotation up to 350°
- Adjustability : pivoted up to 110° , down to 15°.
- Made in Beloeil, Canada.

Due to continuous improvements, the information herein may be changed without notice

# Sun Catcher



## TYPICAL APPLIATION OF THE SUN CATCHER

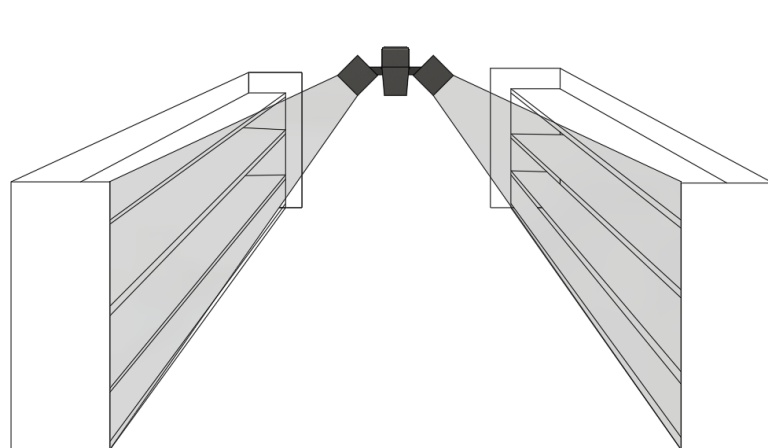

- Suspended or Track mounted
- Swiveling arms  $-15^{\circ} + 110^{\circ}$

