



Z SWAP Tool-less interchangeable reflector assembly system
SHIP2FAST Fast delivery program

ansorg

ON LIGHT

Iqona IMT 3" LED TRACK LIGHT




IMT	DELIVERED LUMENS	LED COLOR	CRI	BEAM SPREAD	VOLTAGE	HOUSING COLOR	MOUNTING
Iqona IMT	5 500 LM (5W) 10 1000 LM (10W) 15 1500 LM (15W) 20 2000 LM (20W) *Custom lumen output on request.	27 2700 K 30 3000 K 35 3500 K 40 4000 K 50 5000 K B Bread color M Meat color F Fish color	84 nominal CRI at 3500k 90 90 CRI min. value 97 (2700k 3000K 5600K) A A Class* (3000K, 3500K, 4000K)	SP 17° (reflector) SSP 20° (reflector) MFL 22° (reflector) FL 37° (reflector) WFL 54° (reflector) VWFL 66° (reflector) SPL 13° (lens) FLL 27° (lens)	1 120V	WH RAL 9016 white BK RAL 9005 black SL RAL 9006 silver • Custom color	3C 3 circuits GLOBAL® or on Stucchi® track system.

ACCESSORIES : Order as separate part number.
CBU Casambi dimming (DALI or 0-10V) bluetooth control


DELIVERED LUMEN Nominal value at 3500K & 84 CRI															
CCT OPTION	2700K	2700K	2700K	3000K	3000K	3000K	3500K	3500K	3500K	4000K	4000K	4000K	Bread	Meat	Fish
CRI OPTION	84	90	97	80/A	90	97	84	90	A/80	84	90	A/80	80	80	80
MULTIPLIER	.93	.77	.67	.96	.80	.71	1	.83	.78	1.0	0.86	.83	.86	.53	1

DIMENSIONS

*dimensions are in mm

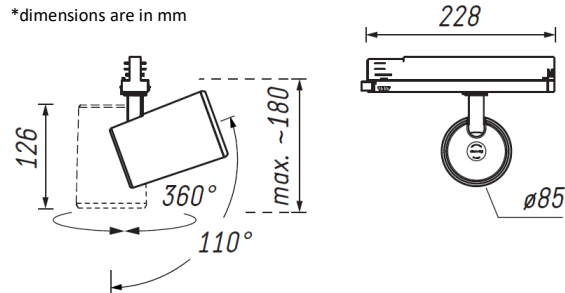

Weight trim: 1.5 lb (0.8 kg) **Diameter:** 3-11/32" (85mm)
Max height: 7" (180mm)

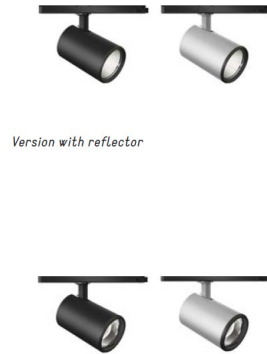

ON LIGHT CHEAT SHEET :

- Nominal Efficacy : up to 131 lm/W
- 3-Step MacAdam ellipse color consistency for clean and uniform lighting.
- Lumen maintenance L80/B10 :50 000h ta 25°C
- 5-year warranty on LED light engine, driver and all lighting fixture components.
- Failure rate C0/B10 : 50 000h ta 25°C
- Max settable driver output : 120W (500lm-2000lm). Intrack driver class2.
- Tool-less interchangeable reflector and accessories assembly system.
- Number per circuit breaker 20A : 50
- ETL certified to US and Canadian safety standards.
- Mini. R9 value for 80 CRI CRI is 0. the min. R9 values for 90 LED is 50. the min. R9 value for 97 CRI LED is 93. For Décor series LED, Typical R9 value is 98 to enhance RED's and an R15 value of 97
- Luminaires are assembled in Canada, Beloeil.





Z SWAP Tool-less interchangeable reflector assembly system
SHIP2FAST Fast delivery program

ansorg

ON LIGHT

Iqona IMT 3" LED TRACK LIGHT

Light distribution with reflector

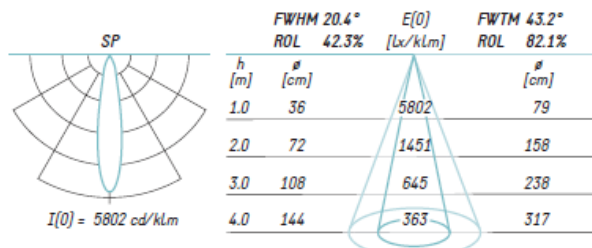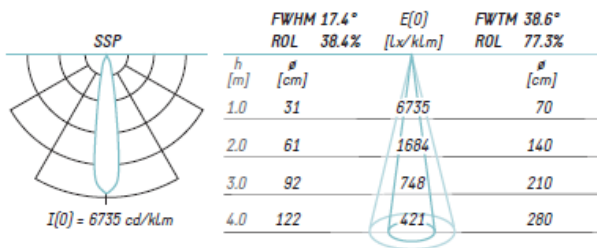

Light distribution with lens, continuously between SP and FL

